


SL60120 | Packaging Waste Shredding and Baling System



Global Shredding Solutions
Documents · Metals · Plastics · Composites · Shredding Systems

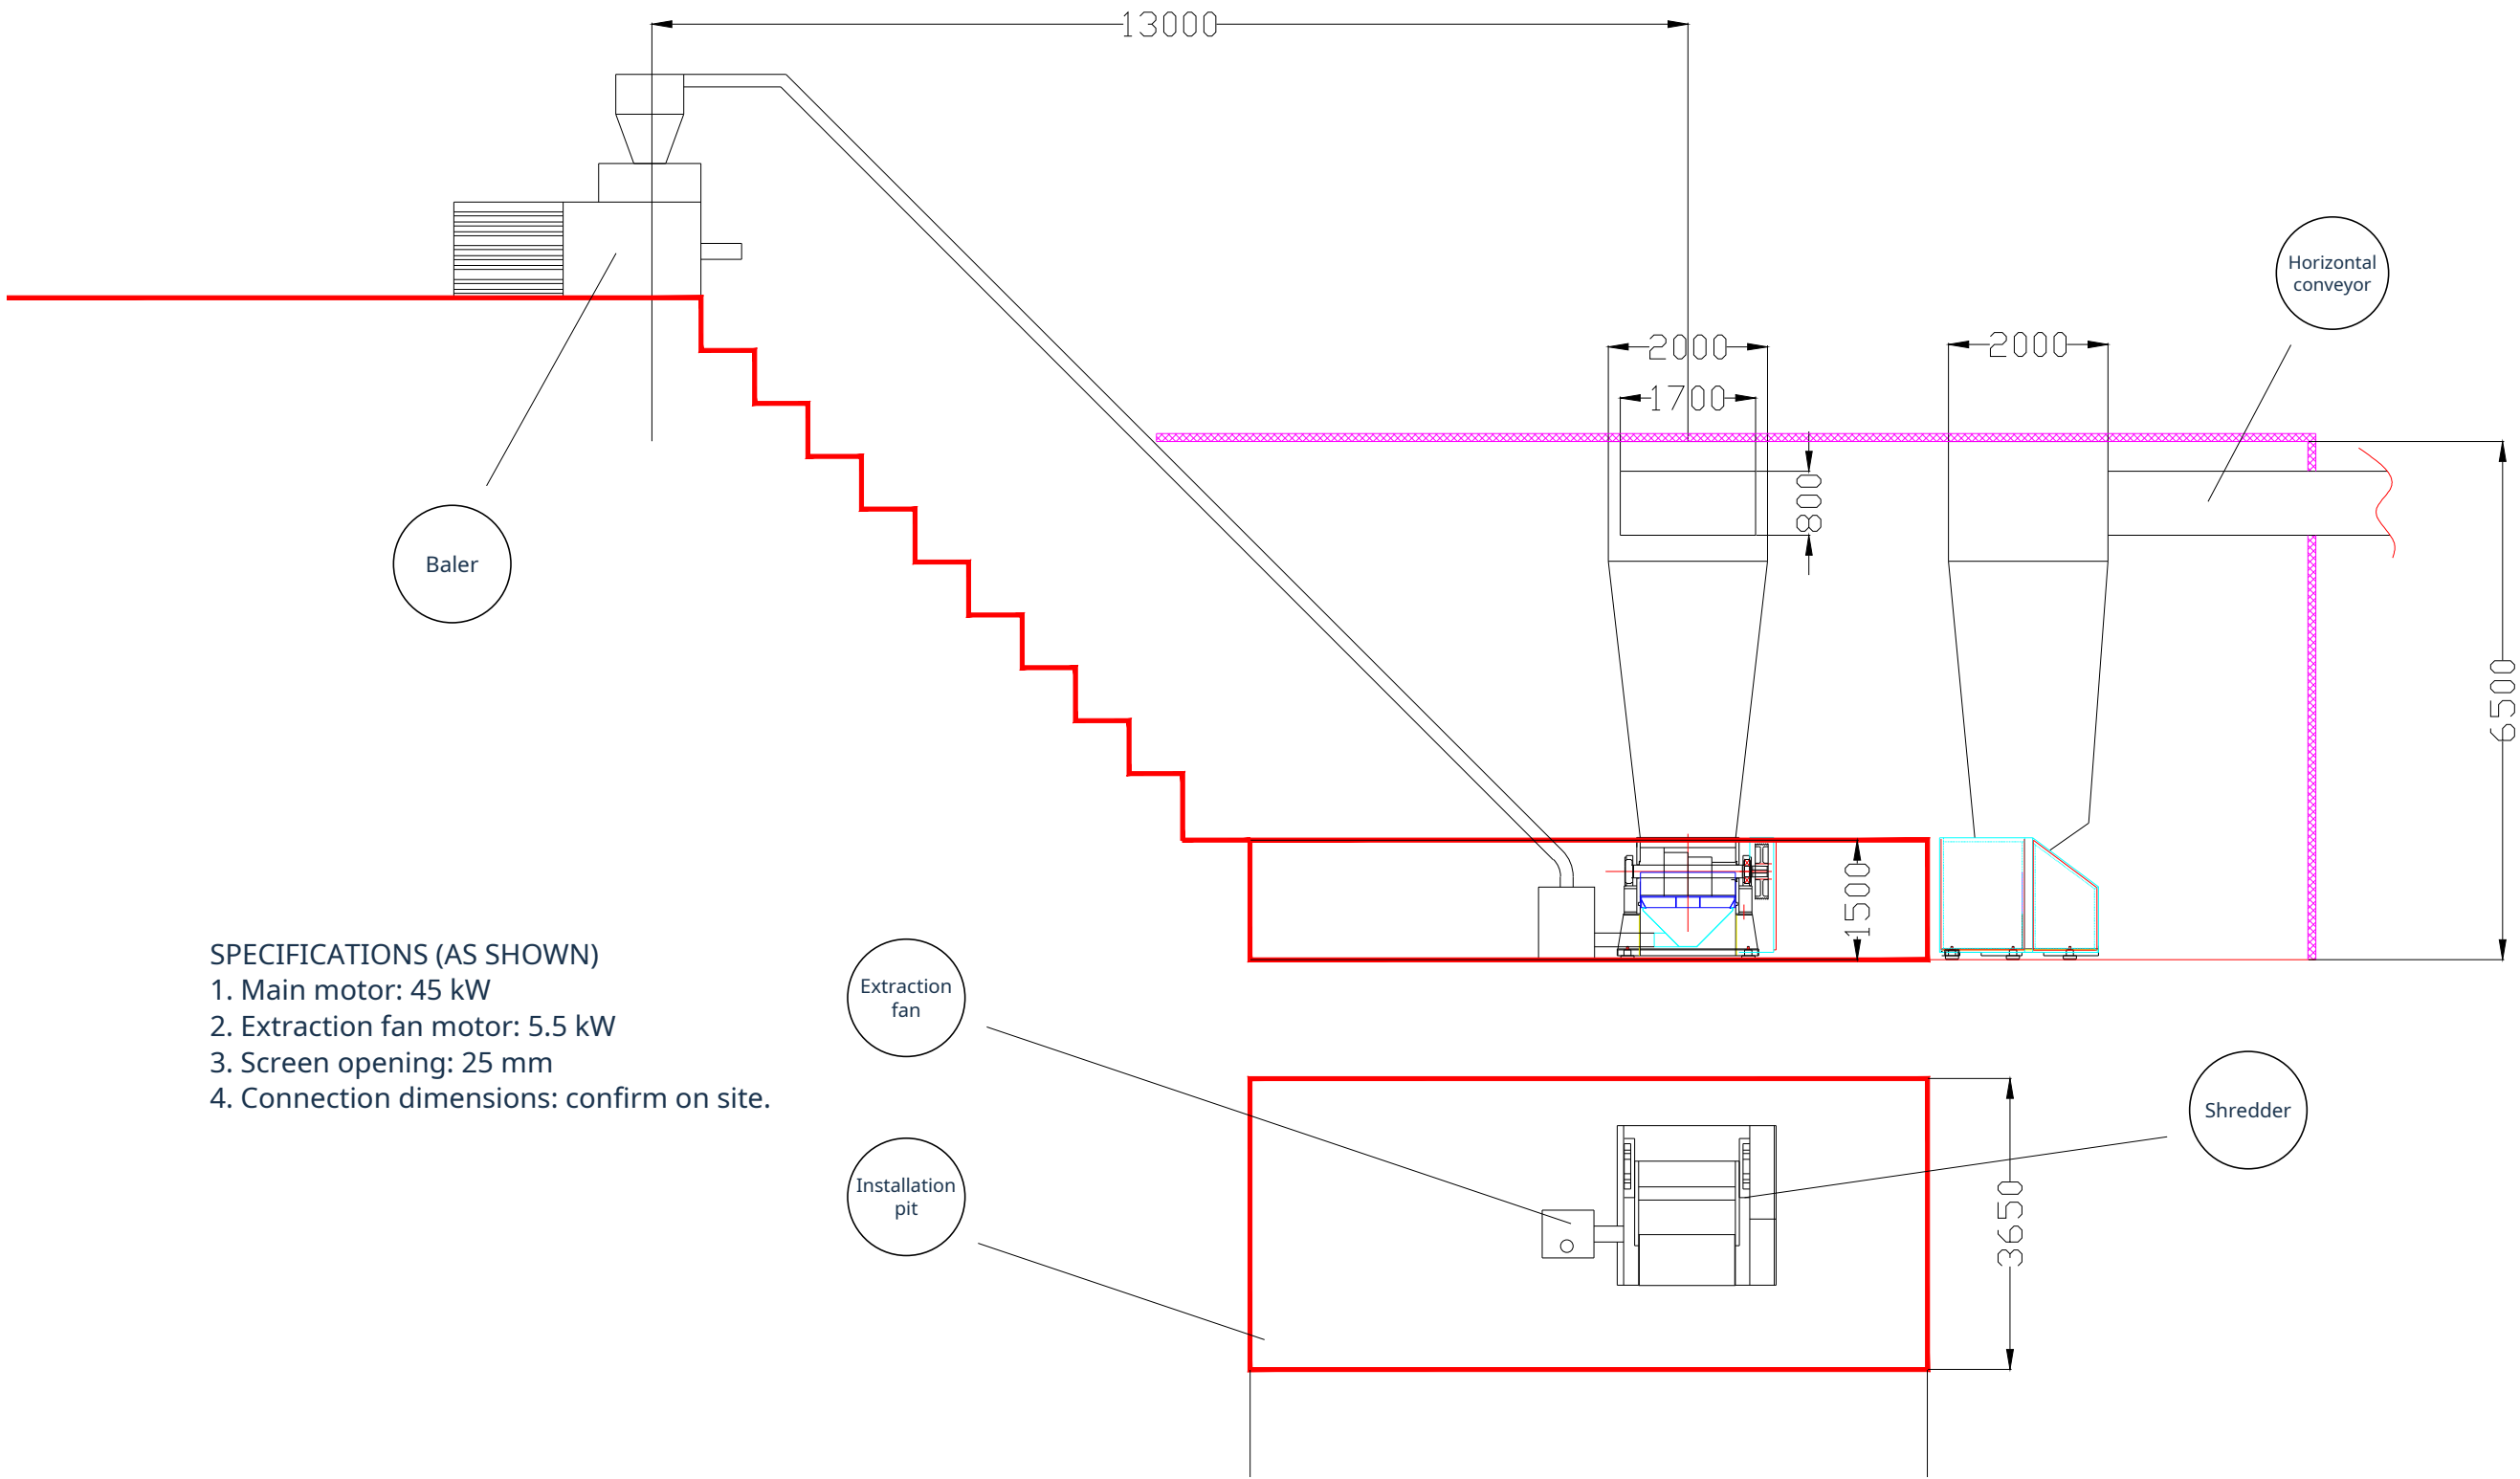

- SPECIFICATIONS (AS SHOWN)
- 1. Main motor: 45 kW
 - 2. Extraction fan motor: 5.5 kW
 - 3. Screen opening: 25 mm
 - 4. Connection dimensions: confirm on site.

ON-SITE INSTALLATION NOTE
The equipment is installed in a recessed pit. For site access, the machine can be separated into major assemblies: center housing, cutter assembly, base, upper housing, and upper sheet-metal components. The upper feed assembly consists of removable panels that are bolted together on site.